

KOCOM



2018 PRODUCTS CATALOGUE

DISTRIBUTED BY:



TECHNOLOGIES

www.bgwt.com.au



A blurred background image of a modern living room. It features a white sectional sofa, a low wooden coffee table, and a large window on the right side. The room has a bright, airy feel with natural light coming in from the window.

IOT SMART HOME

KOCOM'S IP VIDEOPHONE SYSTEM

KCV-S701IP NEW

- 7" Color digital LCD monitor
- Easy to operate using OSD menu and icon button
- Receive call & door open from Smartphone
- Door camera monitoring from Smartphone
- Security sensors adaptable



COLOR



BLACK





WHITE

SPECIFICATIONS

Model	KCV-S701IP
Display	7" Digital LCD
Power Source	AC100V ~ 240V, 50Hz/60Hz
Power Consumption	4.5W(Standby), 15W(Max)
Mount Type	Surface mount
Operating Temperature	0°C ~ +40°C
Dimesion	197(W) x 176(H) x 23(D) mm

WIRING DIAGRAM

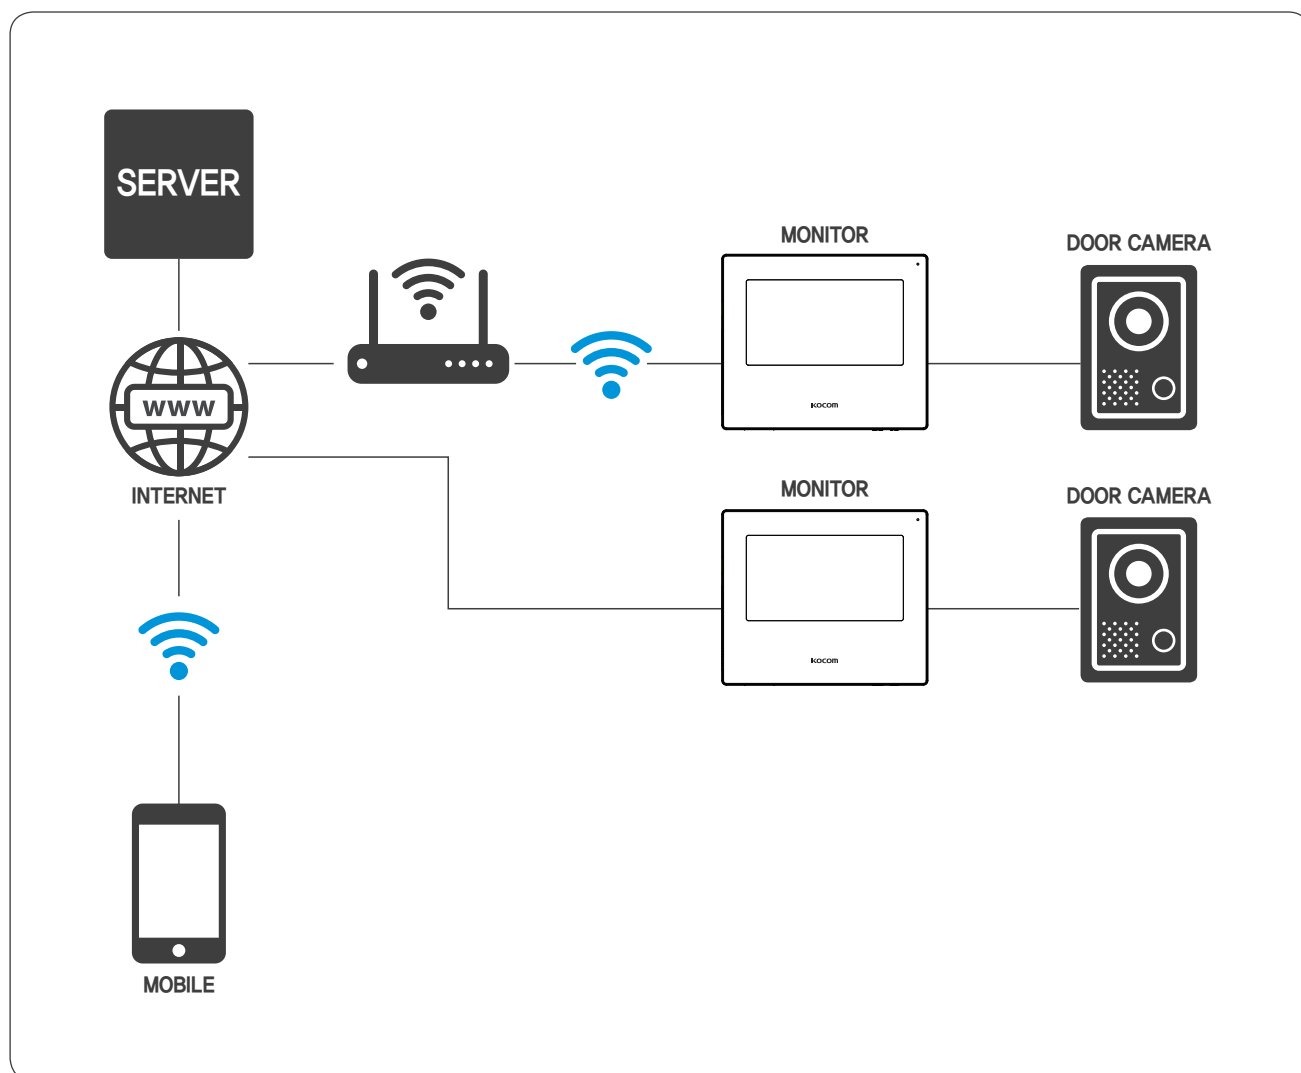

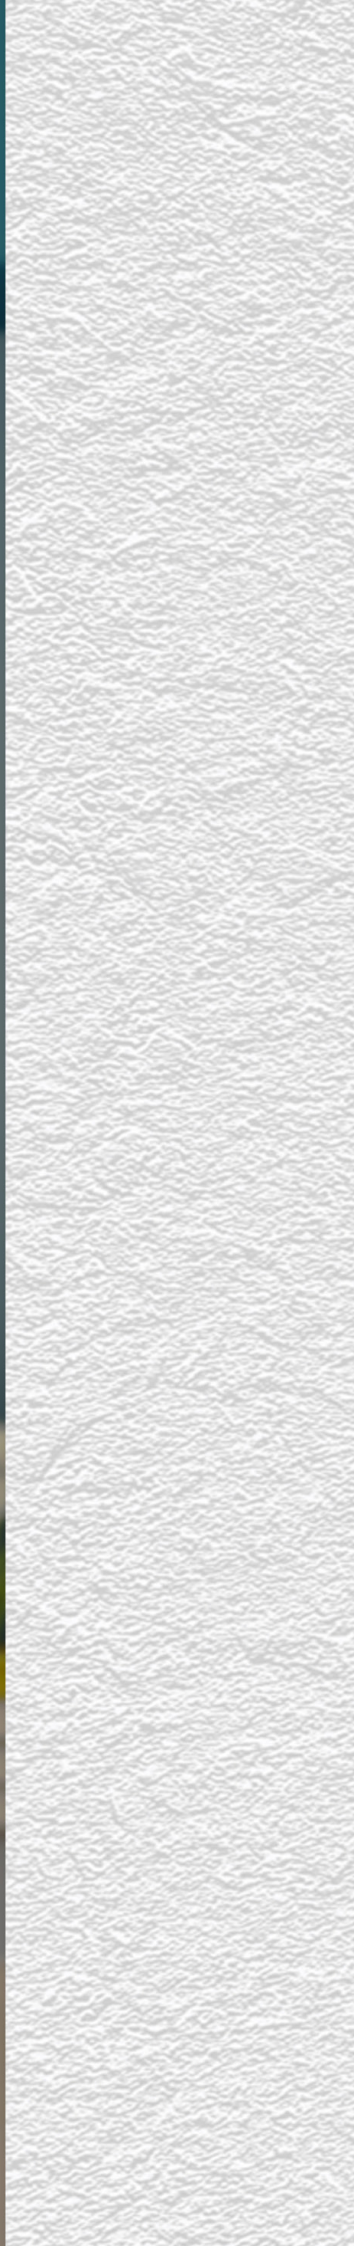


4 WIRE APARTMENT SYSTEM MONITOR

KCV-544SD · D544SD NEW

- 7" Color digital LCD monitor · Customer-customized UI/Full Touch Screen
- Compatible with 1080p(FHD) AHD CCTV (TVI , AHD , CVI)
- CCTV Motion Detection / Recording function(1080P)
- Connection up to 2 Door Cameras and 2 Monitors or 1 Door camera and 1 CCTV camera with Sub- interphone (KIP-32G)
- Internal Communication between indoor units · Multifamily, Application (KLP-C420 SYSTEM)
- Compatible with SDXC 128GB(MAX) Micro SD CARD
- Auto Video Recording(Door Camera) · e-Album (includes music function)




COLOR




SPECIFICATIONS

Model No.	KCV-544SD	KCV-D544SD
Power Source	AC100-240V, 50/60Hz	DC 15V-2A
Power Consumption	5W(Standby), 12W(Max.)	
LCD	7" Digital LCD	
Communication System	Hands-free Type	
Operating Temperature	0°C ~ +40°C	
Mount Type	Surface mount	
Dimesion	223(W) X 130(H) X 33(D) mm	

WIRING DIAGRAM

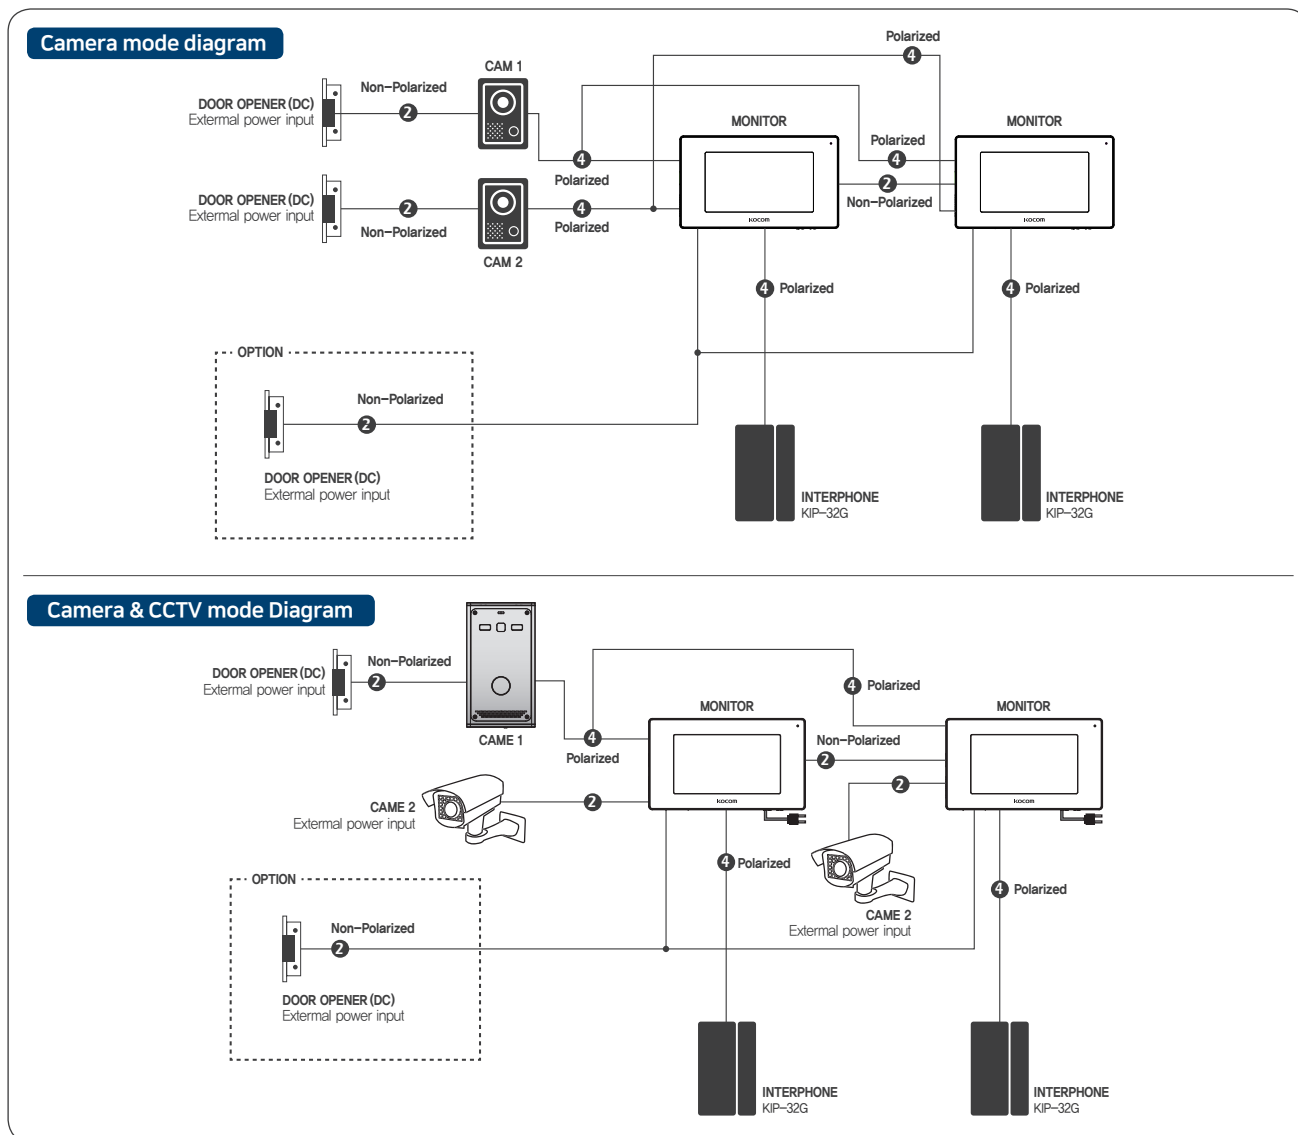

PRODUCT DIMENSION

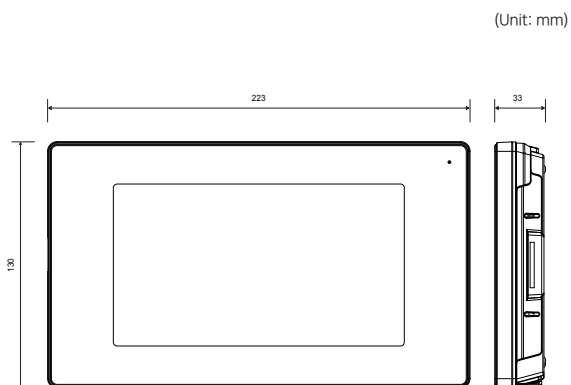

CONNECTABLE PRODUCT



4 WIRE APARTMENT SYSTEM MONITOR

KCV-A374·D374

- 7" Color digital LCD monitor
- Easy to operate using OSD menu and icon button
- 5 Melody Selection
- Communication between Door camera, Guard phone and Lobby phone
- Connection up to 2 Door Cameras and 2 Monitors with Sub-Audio Unit (KDP-602G)
Internal communication between indoor units



COLOR



BLACK




WHITE


SPECIFICATIONS

Model No.	KCV-A374	KCV-D374
Power Source	AC 100V-AC240V 50/60Hz	DC 15V ±10%
Power Consumption	0.8W(Standby), 13W(Max.)	
LCD	7" Digital LCD	
Communication System	Hands-free Type	
Operating Temperature	0°C ~ +40°C	
Mount Type	Surface mount	
Dimesion	222(W) × 144(H) × 33(D)mm	

WIRING DIAGRAM

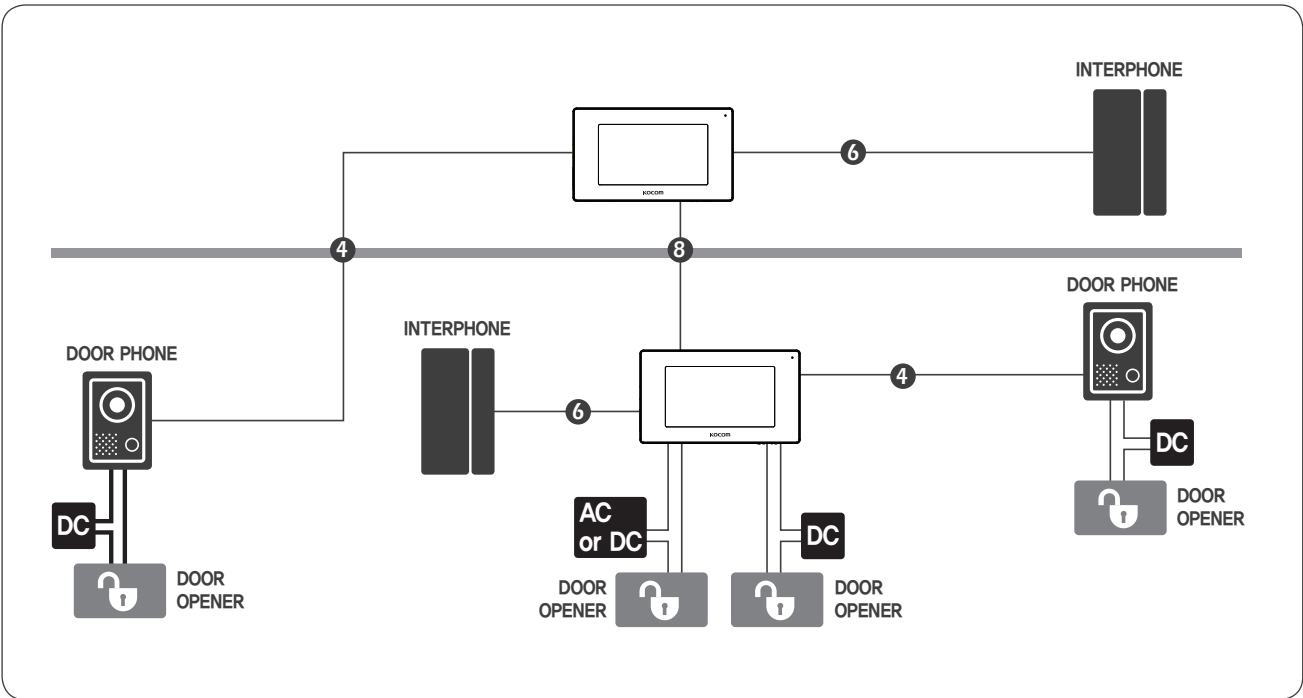

PRODUCT DIMENSION

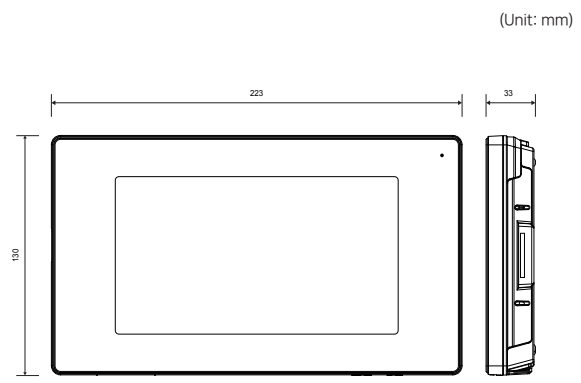

CONNECTABLE PRODUCT



4 WIRE APARTMENT SYSTEM MONITOR

KCV-504·D504

- 7" Color digital LCD monitor
- Easy to operate using OSD menu and icon button
- Communication between Door camera, Guard phone and Lobby phone
- Connection up to 1 Door camera and 1 monitor



COLOR



BLACK




WHITE


SPECIFICATIONS

Model No.	KCV-504	KCV-D504
Power Source	AC 100-240V, 50/60Hz	DC 15V-2A(JPW128KA1502N05)
Power Consumption	Stand by 1.5W, In load 11W(±20%)	
LCD	7" Digital LCD	
Communication System	Hands-free Type	
Operating Temperature	0°C ~ +40°C	
Mount Type	Surface mount	
Dimesion	223(W) x 130(H) x 26(D) mm	

WIRING DIAGRAM

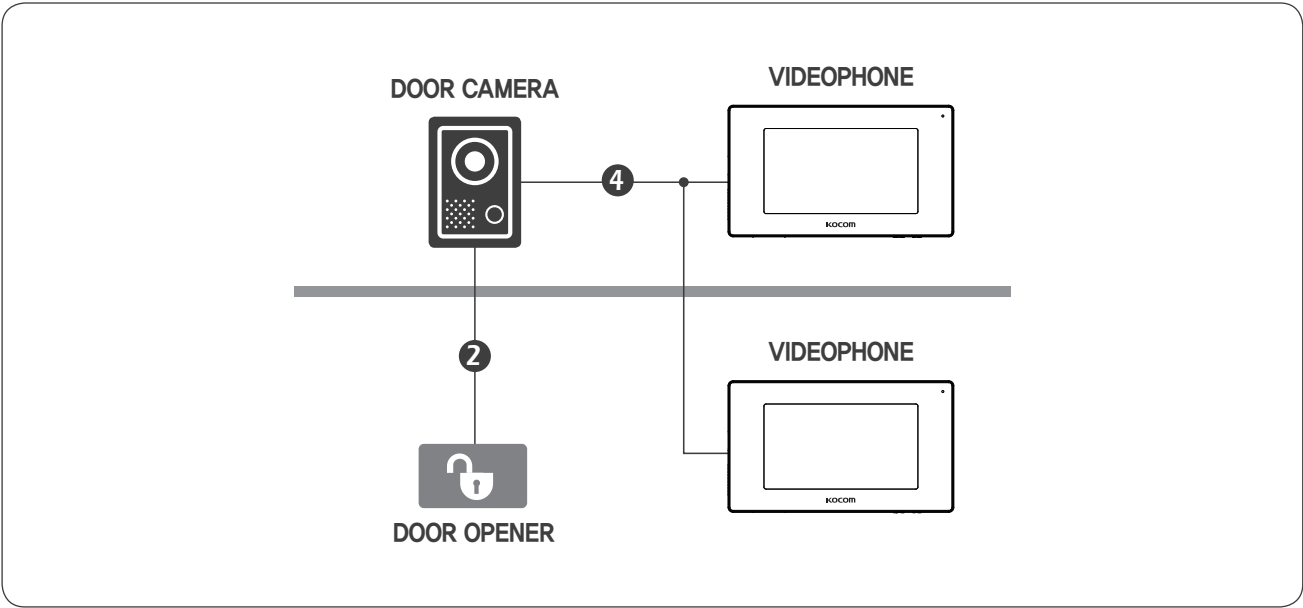

PRODUCT DIMENSION

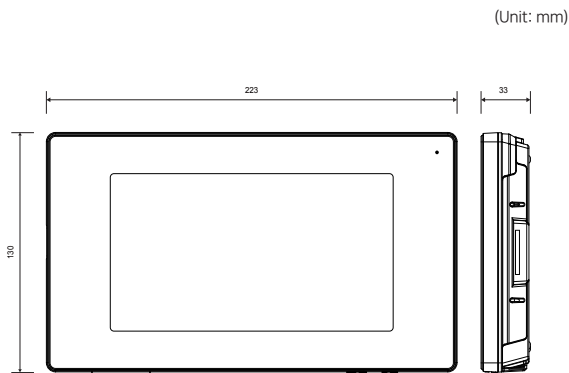

CONNECTABLE PRODUCT



4 WIRE APARTMENT SYSTEM MONITOR

KCV-W354·DW354

- 3.5" Color digital LCD monitor
- Easy to operate using OSD menu and icon button
- 5 Melody Selection
- Communication between Door camera, Guard phone and Lobby phone
- Connection up to 2 Door Cameras and 2 Monitors with Sub-Audio Unit (KDP-602G)
- Internal Communication between indoor units



COLOR



WHITE




RED


SPECIFICATIONS

Model No.	KCV-W354	KCV-DW354
Power Source	SMPS AC 127V 60HZ	DC 15V (1.2A)
Power Consumption	0.7W(±20%)(Stand by), 13W(±20%)(In load)	1W(±20%)(Stand by), 13W(±20%)(In load)
LCD	3.5" Digital LCD (NTSC / PAL Auto switching)	
Communication System	Hands-free Type	
Operating Temperature	0°C ~ +40°C	
Mount Type	Surface mount	
Dimesion	195(W) x 140(H) x 34(D) mm	

WIRING DIAGRAM

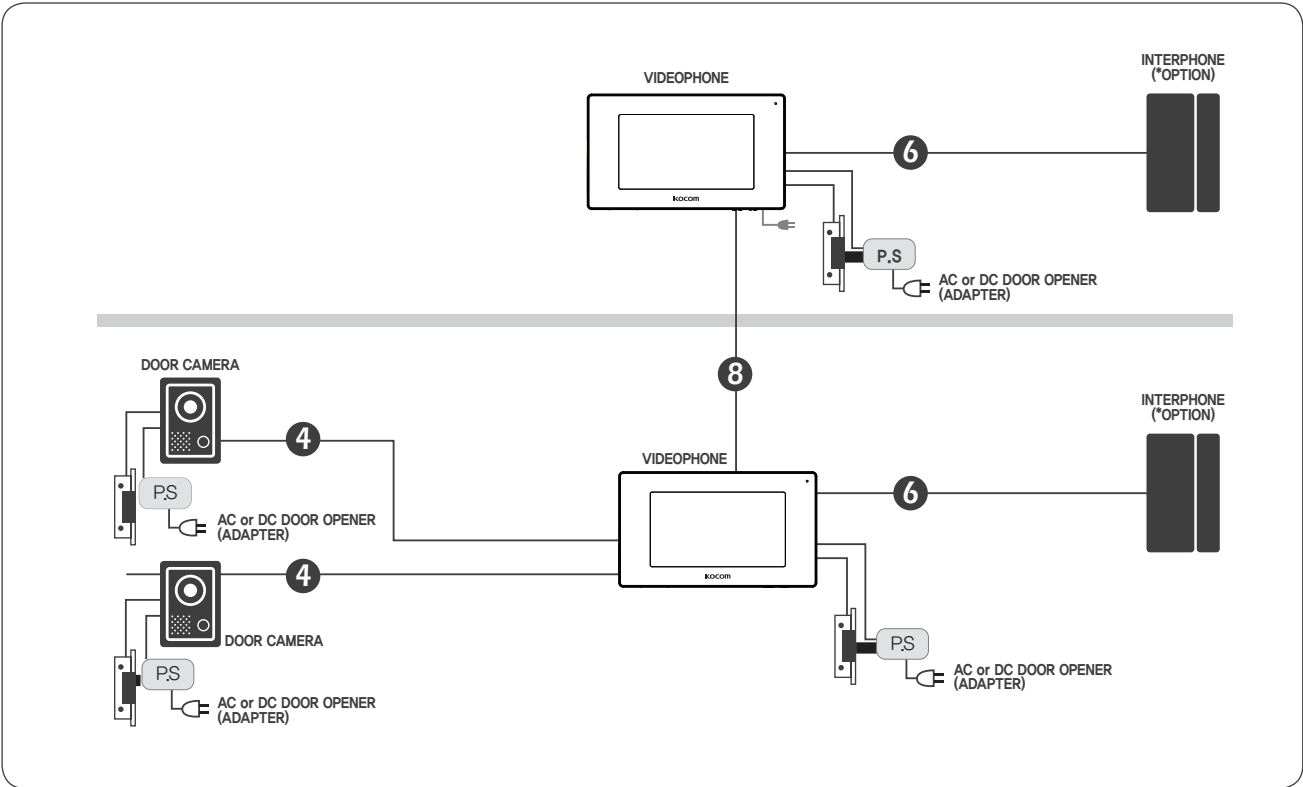

PRODUCT DIMENSION

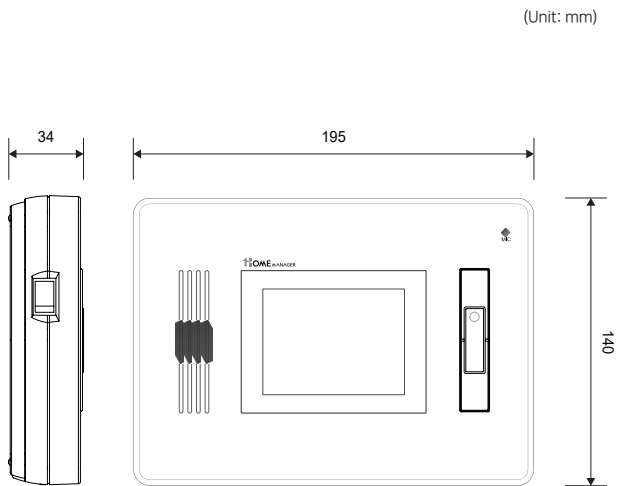

CONNECTABLE PRODUCT



KU-ESA

4
WIRE




- Up to 4 Door Cameras or CCTV Cameras & 16 Monitors (2 Monitors PER 1 Port) connection
- 2 More KU-ESA connections available in case of setting KU-ESA as SUB (Max. connection in case of using 3 KU-ESA : 12 Cameras & 48 Monitors)
- One selected Camera Monitoring available
- Internal call & Communication available between extended indoor units
- Multi-call & Vid
- Monitor connection : KCV-A374/D374/, KCV-W354/DW354

UP TO 3 EXTENSION IS AVAILABLE

(Max. 27 monitors & 12 door (CCTV) cameras connection).

KCV-A374, KCV-W354 & all DC type VDP for the mentioned is compatible with distributor.


WIRING DIAGRAM

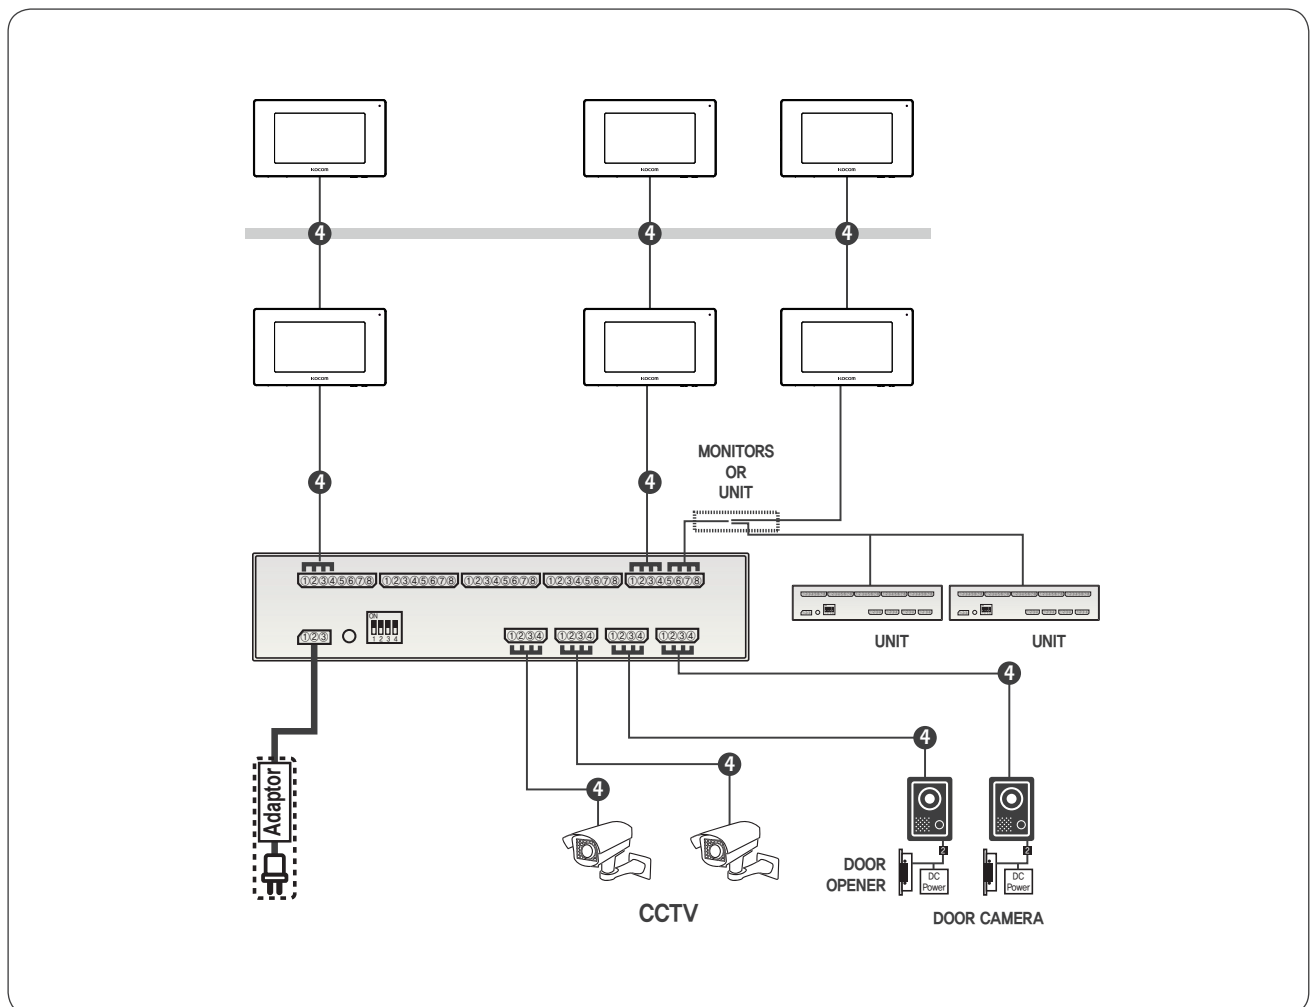

2 WIRE NON-POLARITY VIDEOPHONE MONITOR

KCV-D372

- 7" Color digital LCD monitor
- Easy to operate using OSD menu and icon button
- Communication between Door camera and Multi entry video panel
- Connection up to 1 Door camera and 2 Monitors

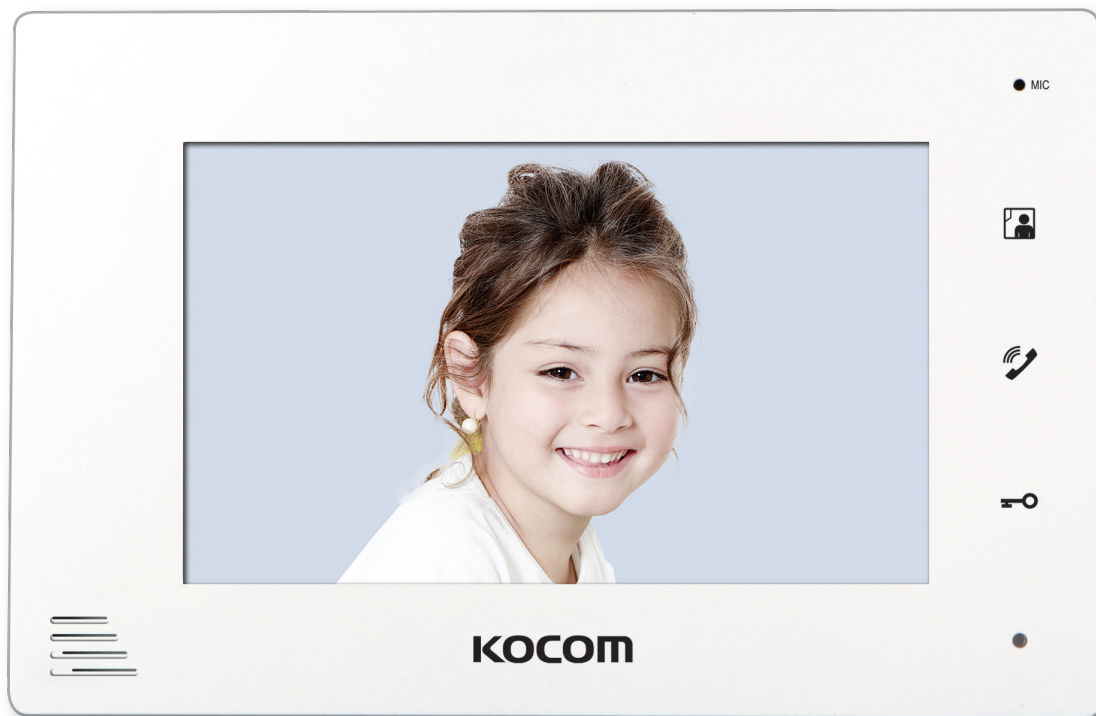

COLOR



WHITE




BLACK


SPECIFICATIONS

Model No.	KCV-D372
Power Source	DC 12V±3V
Power Consumption	1.2W(±20%)(Stand by), 8W(±20%)(In load)
Operating Temperature	0°C ~ +40°C
LCD	7" Digital LCD
Communication	Hands-free Type
Wiring	Door camera : Non-polarized 2 wire Ex_Monitor : Polarized 2 wire
Mount Type	Surface mount
Dimesion	222(W) x 144(H) x 26(D) mm

WIRING DIAGRAM

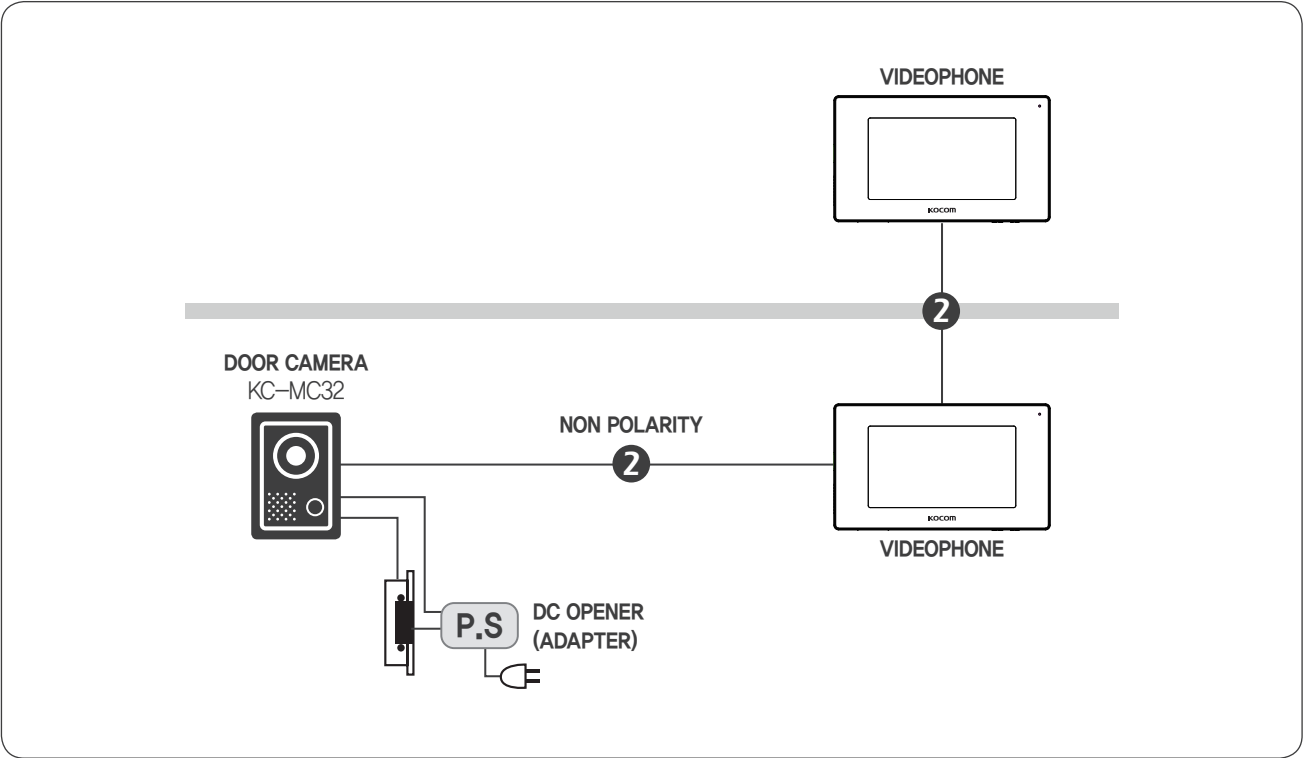

PRODUCT DIMENSION

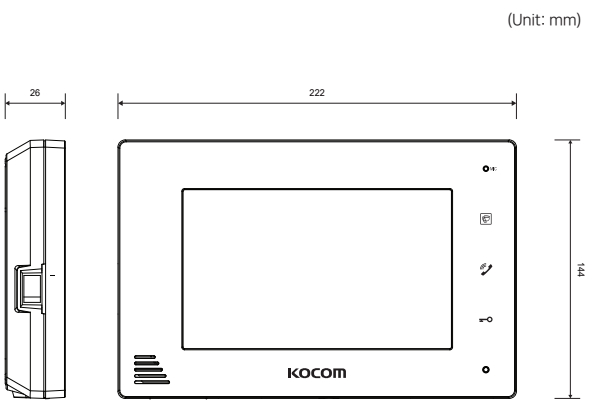

CONNECTABLE PRODUCT



2 WIRE NON-POLARITY VIDEOPHONE MONITOR

KCV-352·D352

- 3.5" Color digital LCD monitor
- Easy to operate using OSD menu and icon button
- Communication between Door camera and Multi entry video panel
- Connection up to 1 Door camera and 2 Monitors



COLOR



WHITE




RED


SPECIFICATIONS

Model No.	KCV-352	KCV-D352
Power Source	AC 127V 60HZ	DC 12V±3V
Power Consumption	0.7W(Stand by), 10.5W(In load)	0.7W(Stand by), 10.5W(In load)
LCD	3.5" Digital LCD (NTSC / PAL Auto switching)	
Communication System	Hands-free Type	
Operating Temperature	0°C ~ +40°C	
Mount Type	Surface mount	
Dimesion	195(W) x 140(H) x 34(D) mm	

WIRING DIAGRAM

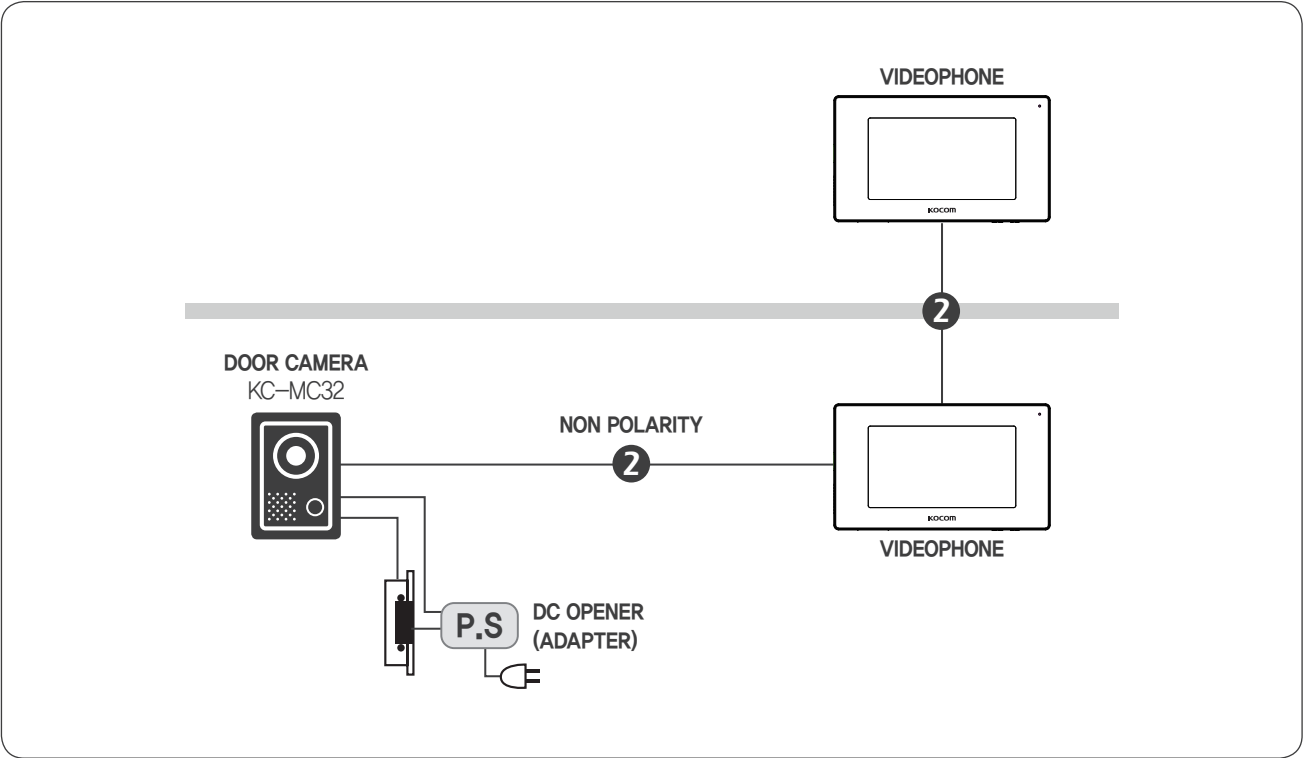

PRODUCT DIMENSION

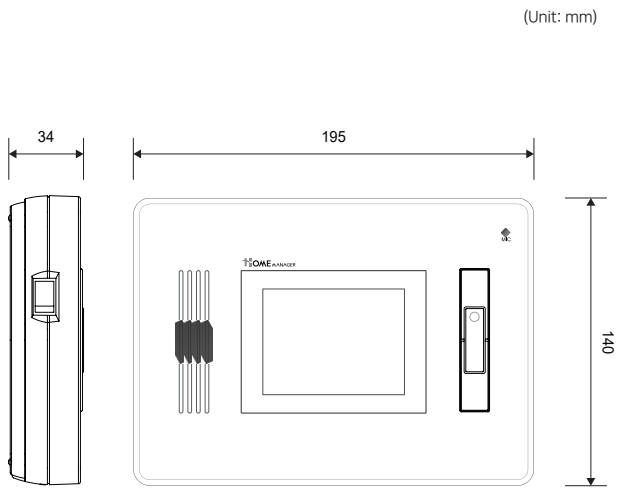

CONNECTABLE PRODUCT





DOOR CAMERA

Door camera show
KOCOM's excellent technology for
smooth communication between a
household and an apartment complex.

KOCOM is leading the global market with high technical power and quality for stable door access control. KOCOM introduces you a door lock and a door camera that it is possible to control more safely door access which is easy to be exposed.



DOOR CAMERA

KC-S81M NEW4
WIRE


SUNVISOR



SPECIFICATIONS

Power	DC 11V±1V(power from monitor)
Power Consumption	Max. 3W
Wiring	4 Wire
Body Material	Metal
Mount Type	Surface mount
Camera Angle	100 ° (Angle Adjustable)
Min. Illumination	0.1 lux(LED ON)
Dimesion	70(W) x 125(H) x 21(D)mm

WIRING



DOOR CAMERA

KC-94 NEW4
WIRE


SUNVISOR



SPECIFICATIONS

Power	DC 12V±1V(power from monitor)
Power Consumption	Max. 2,5W
Wiring	4 Wire
Body Material	Plastic
Mount Type	Flush mount
Camera Angle	100 ° (Angle Adjustable)
Min. Illumination	0.1 lux(LED ON)
Dimesion	89(W) x 131(H) x 13(D)mm

WIRING



DOOR CAMERA

KC-MC304
WIRE


SUNVISOR



SPECIFICATIONS

Power	DC 12V±1V(power from monitor)
Power Consumption	Max. 2,5W
Wiring	4 Wire
Body Material	Metal
Mount Type	Surface mount
Camera Angle	100 ° (Angle Adjustable)
Min. Illumination	0.1 lux(LED ON)
Dimesion	110(W) x 158(H) x 39(D)mm

WIRING




DOOR CAMERA

KC-C604
WIRE

SPECIFICATIONS

Power	DC 12V±1V(power from monitor)
Power Consumption	Max. 2,5W
Wiring	4 Wire
Body Material	Plastic
Mount Type	Surface mount
Camera Angle	100 ° (Fixed)
Min. Illumination	0.1 lux(LED ON)
Dimesion	95(W) x 127(H) x 34(D)mm

WIRING



DOOR CAMERA

KC-Q81P

4
WIRE


SUNVISOR



SPECIFICATIONS

Power	DC 12V±1V(power from monitor)
Power Consumption	Max. 3W
Wiring	4 Wire
Body Material	Plastic
Mount Type	Surface mount
Camera Angle	100 ° (Angle Adjustable)
Min. Illumination	0.1 lux(LED ON)
Dimesion	75(W) x 136.5(H) x 18.5(D)mm

WIRING



DOOR CAMERA


KC-MC24

4
WIRE

SPECIFICATIONS

Power	DC 12V±1V(power from monitor)
Power Consumption	Max. 2.5W
Wiring	4 Wire
Body Material	Metal
Mount Type	Surface mount
Camera Angle	90 ° (Fixed)
Min. Illumination	0.1 lux on the object(LED ON)
Dimesion	95(W) x 127(H) x 32(D)mm

WIRING



DOOR CAMERA

KC-MC20

4
WIRE


SUNVISOR



SPECIFICATIONS

Power	DC 12V±1V(power from monitor)
Power Consumption	Consumption : Max. 2.5W
Wiring	4 Wire
Body Material	Metal
Mount Type	Surface mount
Camera Angle	90 ° (Fixed)
Min. Illumination	0.1 lux on the object(LED ON)
Dimesion	40(W) x 120(H) x 22(D)mm

WIRING




DOOR CAMERA KC-MC32



SPECIFICATIONS

Power	DC 12V±1V(power from monitor)
Power Consumption	Max. 3W
Wiring	2 Wire
Body Material	Metal
Mount Type	Surface mount
Camera Angle	100 ° (Angle Adjustable)
Min. Illumination	0.1 lux(LED ON)
Dimesion	110(W) x 158(H) x 39(D)mm

WIRING




DOOR CAMERA KC-MC22



SPECIFICATIONS

Power	DC 12V±1V(power from monitor)
Power Consumption	Max. 2.5W
Wiring	2 Wire
Body Material	Metal
Mount Type	Surface mount
Camera Angle	90 ° (Fixed)
Min. Illumination	0.1 lux on the object(LED ON)
Dimesion	95(W) x 127(H) x 32(D)mm

WIRING




DOOR CAMERA KC-MC11



SPECIFICATIONS

Power	DC 12V±1V(power from monitor)
Power Consumption	Max. 2.5W
Wiring	2 Wire
Body Material	Metal
Mount Type	Surface mount
Camera Angle	90 ° (Fixed)
Min. Illumination	0.1 lux on the object(LED ON)
Dimesion	40(W) x 120(H) x 22(D)mm

WIRING




DOOR CAMERA KC-C62



SPECIFICATIONS

Power	DC 12V±1V(power from monitor)
Power Consumption	Max. 2.5W
Wiring	2 Wire
Body Material	Plastic
Mount Type	Surface mount
Camera Angle	100 ° (Fixed)
Min. Illumination	0.1 lux(LED ON)
Dimesion	95(W) x 127(H) x 34(D)mm

WIRING



2018
PRODUCTS
CATALOGUE

Vol.1



DISTRIBUTED BY:



Contact your BGWT local branches:

BGWT QLD ☎ (07) 3252 9765 ✉ qldsales@bgwt.com.au

BGWT NSW ☎ (02) 9674 4255 ✉ nswsales@bgwt.com.au

BGWT VIC ☎ (03) 9646 2033 ✉ vicsales@bgwt.com.au

BGWT SA ☎ 0419 443 359 ✉ sasales@bgwt.com.au

BGWT WA ☎ (08) 6271 0603 ✉ wasales@bgwt.com.au

KOCOM CO.,LTD.

www.kocom.com

KOCOM BLDG., 22, Arayuk-ro, Gochon-eup, Gimpo-si, Gyeonggi-do, 10136, Korea

TEL : +82-2-6675-2211 | FAX : +82-2-6675-2000

E - mail : export@kocom.com



※ This catalogue is based on the date as shown in the right and specifications are subject to change without notice for quality improvement.

2018.06